IR-CZ SERIES

HIGH-SPEED RADIATION TERMOMETER



High Accuracy, Fast Response

Wide Low-Temperature Range

Setting Display Unit

Abundant Accessories



Implementing high accuracy and long-term stability

The low-temperature model (2µm) uses a chopper-less structure

The world's best two-color thermometers

Up to 60 °C working temperature

SINGLE COLOR MODELS

Low to Medium Temperature

Distance Factor	Models
50	IR-CZP0
200	IR-CZP2
300	IR-CZP3

■Medium Temperature

Distance Factor	Models
50	IR-CZI0
200	IR-CZI2
300	IR-CZI3
200 with field diaphragm	IR-CZI7
300 with field diaphragm	IR-CZI8

High Temperature

Distance Factor	Models
50	IR-CZS0
200	IR-CZS2
300	IR-CZS3
200 with field diaphragm	IR-CZS7
300 with field diaphragm	IR-CZS8

TWO COLOR MODELS

High Function

Distance Factor	Models
50	IR-CZQ0
200	IR-CZQ2
300	IR-CZQ3
200 with field diaphragm	IR-CZQ7
300 with field diaphragm	IR-CZQ8

■High Accuracy High Temperature

Distance Factor	Models
200 with field diaphragm ϕ 10mm	IR-CZH7
300 with field diaphragm ϕ 10mm	IR-CZH8

Connecting type / Options Sighting type

N : Connector / No option5 : Connector / Analog input 4-20mA

J : Connector/Contact input 1 P, Contact output 2P

T: Terminal/No option

6

Blank: View finder (standard)
3: Built-in close-up lens

300mm*

: Built-in close-up lens 600mm*

: Red color laser targeting (no view finder)

*Applicable for only 2 color models

FEATURES

Implementing high accuracy and long-term stability

Leveraging our experience and know-how, the optical unit and circuit design have been revamped to ensure stable measurement from low to ultra-high temperatures. The long-term stability has been evaluated for about three years and the IR-CZ series maintains the indicated temperature within the accuracy rating.

The low-temperature model (2 µm) uses a chopper-less structure

The previous low-temperature model, the IR-CAP, utilized a PbS detecting element, but the latest model, the IR-CZP, uses an InGaAs detecting element. This improvement in the detecting element gives the IR-CZP a wider low-temperature measurement range.

In addition, the IR-CZP does not have a built-in motor. It uses a chopper-less structure that improves the long-term stability.

The world's best two-color thermometers


The high-temperature, high-accuracy IR-CZH has a new design for the optical unit that reduces chromatic aberration and significantly improves the light-condensing efficiency of the detector. The impact on the indicated value from a lack of view or obstruction has also reduced as much as possible. As a result, the stability of the indicated value of the two-color thermometer is outstanding, and it is widely used in the world's most advanced ultra-high temperature firing processes.

• Up to 60 °C working temperature


This higher working temperature was achieved by using heat-resistant electronic components, improving the heat-resistance of the objective lens, and improving the ambient temperature compensation performance. Combined with our numerous accessories, the IR-CZ can be used in even harsher environments.

CONFIGURATION

■Communication interface and contact output are standard provision.

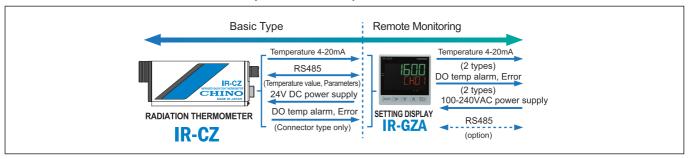



■Compatibility with IR-CA models

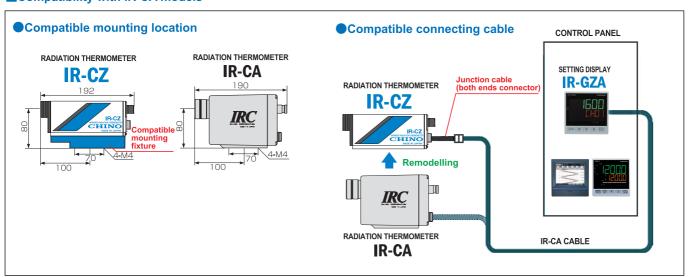






APPLICATIONS

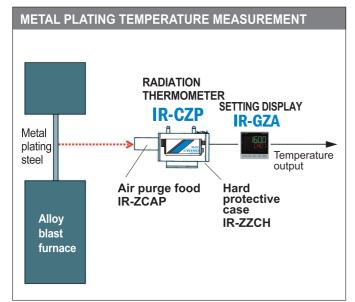




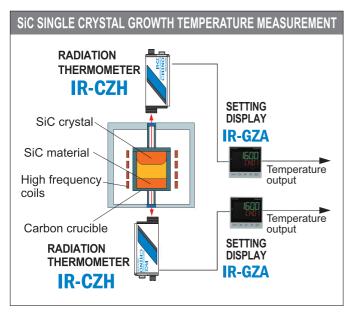



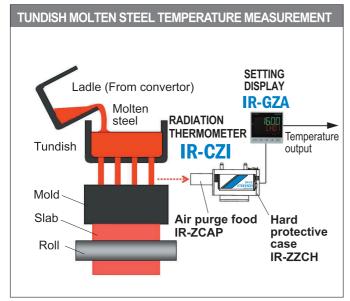



SPECIFICATIONS

3 models of single color thermometers

Low Temperature Low to Medium Temperature High Temperature

Models	IR-CZP	IR-CZI	IR-CZS	
Element	InGaAs	InGaAs	Si	
Measuring wavelength	$2~\mu\mathrm{m}$	1.55 μm	0.9μm	
Measuring range	80 to 1000°C(50)	200 to 1000°C(50)	450 to 2000°C(50)	
(Distance factor	150 to 1400℃(200)	300 to 1600°C(200, 300)	600 to 3000°C(200, 300)	
shows in	200 to 1400°C(300)	400 to 2000°C(200 or 300 when in	700 to 3500°C(200 or 300 when in	
parentheses)		use diaphragm ϕ 10)	use diaphragm ϕ 10)	
Accuracy rating	Lower than 500°C ±3°C	Lower than 1000°C ±5°C	Lower than 1000°C ±5°C	
	500 to 1000°C ±5°C	1000 to 1500°C ±0.5%	1000 to 1500°C ±0.5%	
	Higher than 1000°C ±0.5% of	of measured value	of measured value	
	measured value	Higher than 1500°C	1500 to 2000°C ±0.6%	
		±0.6% of measured value	of measured value	
			High erthan 2500°C ±1%	
			of measured value	
Repeatability	Within 0.2°C			
Temperature drift	500°C or less: 0.15°C / °C	0.1°C / °C or 0.015% / °C of measured	d value whichever larger	
	500°C or higher: 0.25°C / °C			
Resolution	0.5°C			
Response time	3ms			
Distance factor	50, 200, 300			
Sighting	Direct view finder or Laser targeting (option)			
Lens diameter	<i>φ</i> 20mm	ϕ 20mm or ϕ 10mm with field diaphragm		
Working temperature	0 to 50℃	−10 to 60°C		
Power consumption	Max 3.3 VA			

■Common Specifications

Optical System	Focusable Lens Type				
Measuring diameter	Measuring distance:0.5 to ∞	Measuring distance (10 (mama)	
		Distance factor	500	1000	
	Measuring diameter (mm) = Measuring distance	50	φ10	<i>φ</i> 20	2000 φ40
	Distance factor	200	φ1.5 φ2.5	φ <u>2</u> 5	φ40 φ10
	*Consider 1.5 times bigger of measuring diameter due to unstable optical alignment.	300	φ1.7	φ3.4	φ6.7
Display	LCD 4 digits (Temperature and parameter display). Temperature resolutions 1°C(at 1000°C or higher) 0.1°C(at 1000°C or lower)				
Emissivity setting	Setting value: 1.999 to 0.050 (Emissivity ratio setting with 2-colour therm	ometer)			
Signal modulation	· Delay: First-order lag				
	Time constant: 0.000 to 99.9sec (0.1 sec or 0.01 sec or 0.001 sec incre	ments. Real sig	nal must	be set at	0 sec.
	Peak: Peak tracing of highest values, Attenuation factor 0.1 to 10.0°C / 9	sec, 0.1 sec incr	ements s	electable	
Computation function	Zero / Span adjustment, Automatic emissivity calculation, Output compensation				
Analog output	4 to 20mA DC isolated output, load resistance 750Ω or lower				
	· Accuracy rating: ±0.2% of output range				
	· Analog output resolution: 0.003% of output range				
	Output scaling: Enable to set within range				
	· Simulation output: Enable to set within range of 0 to 100% of analog output				
Communications interface	RS485: Transmission of measured data, Transmission & Receiving or vaious parameters)				
Contact output (for connector					
connection model only)	open-collector 30VDC, Max. 50mA.				
Operations keys	Operator mode: Enable to set emissivity (emissivity ratio), signal modulations and alarm				
	· Engineering mode: Enable to set unit, output scaling, zero/span adjustr	nent, reference t	emperati	ure input	of
	automatic emissivity calculation, output compensation and options.				
Self-diagnostic	Thermometer temperature abnormal, Parameter error				
Power suppy	24VDC (Allowable voltage fluctuations range: 22 to 28V)				
Connections	Terminal or connector				
Casing	Aluminum				
Weight	Approx 0.8Kg				



2 models of two color thermometers-

High Function Type

High Temperature High Accuracy Type

IR-CZQ	IR-CZH		
Si / InGaAs / InGaAs	Si / InGaAs		
0.9 / 1.35 / 1.55μm	0.9 / 1.55μm		
350 to 2000°C (50)	900 to 3500°C o to 2000°C		
400 to 2000°C (200) 450 to 2000°C (300)	(200 or 300 with field diaphragm		
500 to 2000°C (300°) 500 to 2000°C (200 with field diaphragm ∮10mm) 550 to 2000°C (300 with field diaphragm ∮10mm)	<i>φ</i> 10mm)		
Lower than 1000°C ±5°C	Lower than 1000°C ±5°C		
1000 to 1500°C	1000 to 1500°C		
±05% of measured value	±0.5% of measured value		
Higher than 1500°C	1500 to 2000°C		
±0.6% of measured value	±0.6% of measured value		
	Higher than 2500°C		
	±1 % of measured value		
Within 0.5°C			
0.2°C / °C or 0.02% / °C of measured value whichever larger			
0.5°C			
2 to 15ms	200、300		
50、200、300	50、200、300		
Direct view finder or Laser targeting (option)			
ϕ 20mm or ϕ 10mm with field diaphragm			
-10 to 60°C			
Max 2.4VA			

Furnace Sediment at furnace hole Window glass Two color thermometers Temperature output 4-20mA Lack of view alarm output

When measuring in a vacuum firing furnace, the field of view may be missing due to dirt on the window glass or deposits on the furnace wall.


Using a two-color thermometer can reduce the effect on the indicated value, but if the field of view is extremely lacking, the indicated value will be affected.

The IR-CZ two-color type can output a warning by calculating the degree of visual field loss from the temperature difference measured for each of the single and two colors inside the thermometer.

Options

Options	Contents
Analog input (Connector type only)	Input signal: 4 to 20mA DC Selectable from emissivity remote setup or automatic emissivity calculation
Contact input (Connector type only)	1 point: Peak hold reset or Sample hold or Laser on/off Dry contact or Open collector
Contact output (Connector type only)	2 points: High (low) alarm or Error signal (self-diagnostic) or Dirty lens detection (2-colour model) Open collector 30V DC, Max. 50mA
Laser targeting	Built-in semiconductor laser emitter. 1 mW or lower (645nm), class 2, No viewfinder


EXTERNAL DIMENSIONS

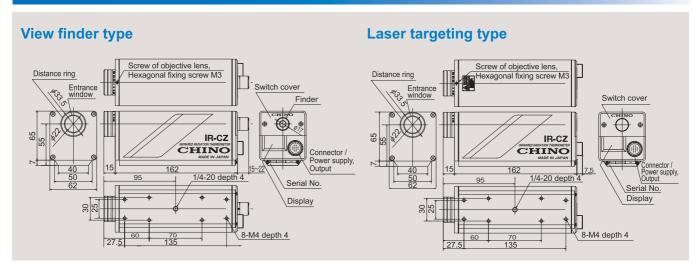

ACCESSORIES


■Soft protective case IR-ZZCS

The soft protective case IR-ZZCS is an exclusive accessory for the IR-CZ series to protect the thermometer from smoke, dust, etc at the installation site. This unit provides air-purge to remove smoke and dust for keeping the lens clean. Use clean instrumentation dried air. (Common use for connector type and terminal type)




■ Airpurge food IR-ZCAP (for IR-ZZCH)

Use when there is a lot of smoke, dust, etc. in the installation location and the measurement optical path is obstructed. Secure the measurement optical path by airpurge.




Flange mounting plate IR-ZCAF (for IR-ZZCH)

The flange mounting unit is used for mounting at the front of hard protective case IR-ZZCH. It is also applicable for mounting various accessories with front 10K 50A flange.




■ Hard protective case IR-ZZCH

The hard protective case IR-ZCCHT is an exclusive accessory for the IR-CZ series to protect the thermometer from high-temperature, humidity, smoke, dust, fume, etc. This unit provides air-purge and water-cooling to operate the thermometer properly in harsh environment. Use clean instrumentation dried air and cooling water without scale. (Common use for connector type and terminal type)




Front water-cooling plate IR-ZZWC (for IR-ZZCH)

The front water-cooling plate is used when installing the thermometer under high ambient temperature. It is mounting to the front of the hard protective case IR-ZZCH.



■Water-cooling flange IR-VSW

The water-cooling flange is used for mounting the hard protective case IR-ZZCH at high temperature wall




Approximately 5.0 kg



■Sealing window IR-ZW

The sealing window is used for protecting the thermometer to create a tight seal between furnace inside and outside whilst furnace temperature measurement. Cleaning and replacing the window glass with less difficulty.



Approximately 17.0 kg

■Connecting cable


IR-ZZRC□□□(for connector type)

Length to be specified in meter (Ex. 001 means 1 meter) *200 meters max

0: Quatz


1: CaF2

2:BaF2




IR-ZCRT (for terminal type)

 Length to be specified in meter (Ex. 001 means 1 meter) *200 meters max



IR-ZZRL (L type cable for connector type)

 Length to be specified in meter (Ex. 001 means 1 meter) *200 meters max



IR-ZZCC (for connecting IR-CA cable)

- S: Communications

K: Contact* Only 0.2m in length

IR-CZ connector

IR-ZCEC connector

6 core sealded soft vinyl cable


Heat resistance: 70°C max

34

36

Mirror IR-ZZLM

Mount the IR-ZZLM with objective lens for enabling to bend a light pass $90\ degrees$



■Compatible mounting base IR-ZCZS

Maintain the same position of IR-CA mounting height.



■Close-up lens IR-ZZD

Utilize for small measuring object.

Enable to shorten a measuring distance in order to measure a small spot size.

Models	Measuring distance
IR-ZZD30A	190-300mm
IR-ZZD60A	270-600mm



SETTING DISPLAY UNIT IR-GZA SERIES


IR-GZA is combined with IR-CZ, IR-SA, IR-CA with optional RS485 to program parameters, to display measuring data and to supply 24V DC power to each connected radiation thermometers.



■General Specifications


Items	Contents		
Connecting thermometer	IR-CZ, IR-SA, IR-CA series		
Thermometer input	RS485		
Function	Temperature display, parameter settings and parameter transmission to thermometer, Temperature alarm judgment, Signal modulation processing, Analog temperature signal transmission Option (Remote emissivity, Reflection compensation)		
Connecting thermometer numbers	1 (Up to 2 units for IR-GZA2 . , prepare separate power supply for the second unit)		
Setting parameter	For thermometers parameter transmission Emissivity: 1.999 to 0.050 Signal modulation mode, signal modulation time constant, attenuation factor, analog output scaling		
Information	Temperature, self diagnostic function		
Signal modulation	DELAY: First-order lag (Modulation time constant: 0.0 to 99.9s, 0.1s increment or 0.00 to 9.99s, 0.01s increment 0.000 to 9.999s, 0.001s increment) Real signal must be set at 0 sec. PEAK: Peak tracing Attenuation degreeSelect within 0.1 to 10.0°C/s, for IR-CZ and IR-CA Select within 0,2,5,10.0°C/s for IR-SA		
Display	Temperature, event status		
Analog output	Output 1IR-GZA output 4 to 20mA DC, Load resistance: 600Ω or less renewal cycle: 0.1s accuracy ratings: 0.3% of output range Output 2 Thermometer output		
Event output	2 points Select 2 points within High temperature alarm, High-high temperature alarm, Low temperature alarm, Low-low temperature alarm and thermometer self diagnostic function Relay-a contact output (Common is same) Contact capacity 240V AC 1.5A, 30V DC 1.5A		
External input	· Optional IR-GZA1 ☐ : Emissivity remote Non-voltage contact, contact capacity 5V DC 2mA IR-GZA2 ☐ : Reflection compensation input 4 to 20mA, Pt100, thermometer (Ch31), key input DC current4 to 20mA (use attached shunt resistor 250Ω, allowable input voltage ±10V DC, accuracy ratings ±0.1% ± 1 digit, sampling speed about 100ms RTDPT100 (allowable input voltage ±5V DC, accuracy ratings, ±0.1% ± 1 digit, sampling speed about 100ms)		
Communications interface	· Optional IR-GZA S: RS485		
Ambient temperature	-10 to 50°C *-10 to 40°C when close installation		
Ambient humidity	20 to 90%RH (No dew condensation)		
Power supply to Thermometer	24V DC, 830mA		
Rated power supply	100 to 240V AC 50/60Hz		
Power consumption	100VAC: Max. 28VA, 240VAC: Max. 36VA		
Terminal size	M3 chip		
Casing	Nonflammable ABS		
Installation	Panel mount type		
Weight CE marking	About 0.5kg EMC: EN61326-1 Class A *Under the test conditions of the EMC directive, indication values and output values which are equivalent to maximum FS±10% may vary. Safety: EN61010-1 Over voltage category II pollution level2 EN61010-2-030		

Models



N : None C : With damp treatment

■External dimentions



Panel cutout



Specifications subject to change without notice. Printed in Japan (I) 2020. 2

CHINO CORPORATION

32-8 KUMANO-CHO,ITABASHI-KU,TOKYO 173-8632

Telephone: +81-3-3956-2171 Facsimile: +81-3-3956-0915 E-mail: inter@chino.co.jp Website: www.chino.co.jp/